


FLEXIBLE COUPLINGS – N-EUPEX, N-EUPEX DS SERIES



General	7/2
Benefits	7/2
Application	7/2
Design and configurations	7/3
Modular principle of N-EUPEX types	7/5
Technical specifications, N-EUPEX series	7/8
Assignment of N-EUPEX sizes to IEC standard motors	7/10
Type A for easy elastomer flexible replacement	7/11
Type B	7/12
Type DK for large misalignment with simple installation and removal	7/13
Type H	7/14
Type D for easy elastomer flexible replacement	7/16
Type E	7/18
Type P with brake drum	7/20
Type O with brake drum	7/22
Type DBDR with brake disk	7/24
Type ABD with brake disk	7/26
 N-EUPEX DS series	 7/27
General	7/27
Technical specifications, N-EUPEX DS series	7/27
Type ADS for easy elastomer flexible replacement	7/28
Type BDS	7/29
Type HDS	7/30
 Spare and wear parts	 7/32

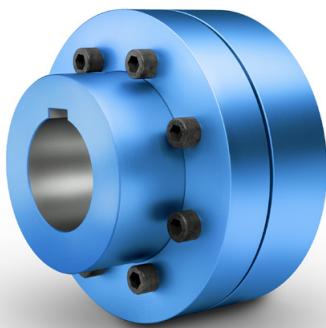


N-EUPEX
FLENDER

GENERAL



N-EUPEX as overload-holding, fail-safe series

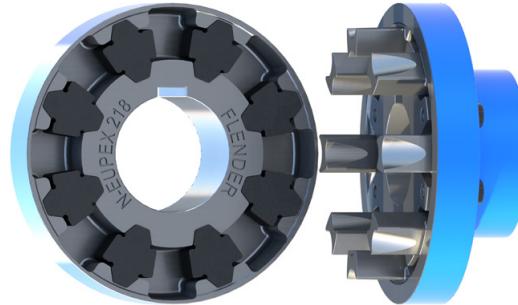

N-EUPEX DS as overload-shedding, non-fail-safe series

N-EUPEX and N-EUPEX DS pin couplings connect machines. They compensate for shaft misalignment, generating only low restorative forces. The torque is conducted through elastomer flexibles, so the coupling has typically flexible rubber properties.

N-EUPEX couplings are overload-holding. By contrast, the N-EUPEX DS series is designed so that overload or advanced wear causes irreparable damage to the elastomer flexibles. The metal parts of N-EUPEX DS couplings can then rotate freely against one another without contact.

Benefits

N-EUPEX couplings are designed on the modular principle and have a very simple construction. N-EUPEX types are made up of subassemblies to suit requirements. The couplings are assembled by simply fitting the coupling halves together. Wear is restricted to the elastomer flexibles, which must be replaced at the end of their service life.

Application

The N-EUPEX coupling is available as a catalog standard in 23 sizes with a rated torque of between 28 Nm and 71000 Nm. The coupling is suitable for ambient temperatures of between -30 °C and +80 °C. By using alternative elastomer flexibles, the permissible ambient temperature range can be extended to between -50 °C and +100 °C. Frequently, the coupling is used to connect the motor to the gear unit input shaft. The coupling is suitable especially for drives with uniform to average dynamic loads.



Coupling suitable for use in potentially explosive atmospheres.

Complies with the current ATEX Directive for:

CE Ex II 2G Ex h IIC T6 ... T4 Gb X

Ex II 2D Ex h IIIC T85 °C ... 110 °C Db X

Ex I M2 Ex h Mb X

Depending on type, the elastomer flexibles can be changed without moving the coupled machines.

The coupling parts are readily available from stock and are mostly finish-machined, i.e. with finished bore, keyway, set screw and balancing.

Examples of applications are pump drives, ventilator drives or crane running gear. Furthermore, N-EUPEX couplings can be used as add-on couplings, particularly on FLUDEX fluid couplings or ARPEX AKR safety couplings. In the case of drives with a diesel engine, N-EUPEX couplings are suitable for driven machines with a low mass moment of inertia. In the case of diesel engine drives, the actual dynamic coupling load should be checked by measurement or torsional vibration calculations.

Design and configurations

N-EUPEX and N-EUPEX DS couplings consist of two coupling halves mounted on the machine shafts. The coupling parts are connected positively by means of elastomer flexibles. On the two-part variant, the elastomer flexibles can be changed only if one of the coupled machines is moved.

On the three-part variants, the bolted cam ring can be released and moved to enable the flexible to be changed without moving the coupled machines.

Elastomer flexible of the N-EUPEX series





The flexibles of the N-EUPEX coupling are subjected to compression. This results in progressive torsion spring characteristics. If the flexibles are irreparably damaged, the hub parts come into contact with metal. This causes the torque to continue to be transmitted in "emergency mode" for a short period of time.

Elastomer flexible of the N-EUPEX DS series



The flexibles of the N-EUPEX DS series are subjected to compression and bending forces. A linear torsion spring characteristic curve is characteristic in this regard. If the flexibles are irreparably damaged, the metal parts turn against one another without contact, and the power transmission is separated. Fitting new flexibles will make the coupling once more usable. The capacity of the N-EUPEX DS series to shed overloads is especially in demand for highly sensitive machines.

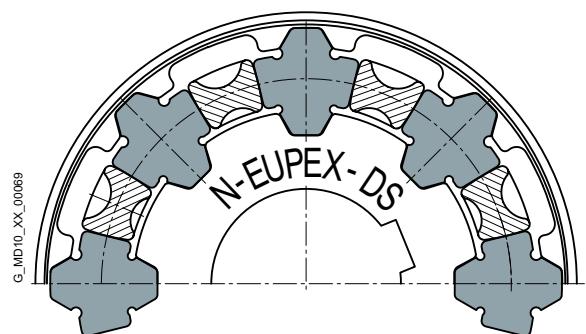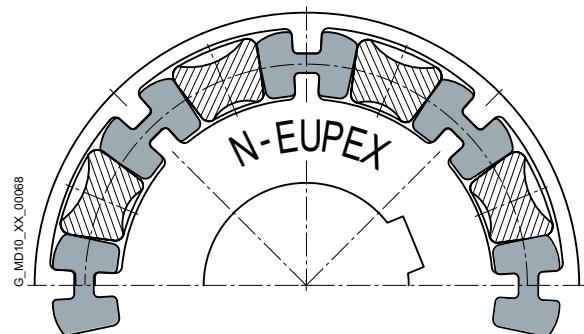

GENERAL

Materials

All coupling parts such as cam parts, pocket parts, spacers, hub parts and mounting parts are manufactured from high grade cast iron with lamellar or spheroidal graphite, or from steel. The sleeve pipes of the type DK spacers are made from aluminum.

Flexible materials

Material/description	Hardness	Marking	Ambient temperature
N-EUPEX series			
NBR standard type	80 ShoreA	Flexible black with blue stripe	-30 °C ... +80 °C
NBR electrically insulating	80 ShoreA	Flexible green	-30 °C ... +80 °C
NBR soft	65 ShoreA	Flexible black with green stripe	-30 °C ... +80 °C
NBR hard	90 ShoreA	Flexible black with magenta stripe	-30 °C ... +80 °C
NBR normal low-backlash	80 ShoreA	Flexible black with yellow stripe	-30 °C ... +80 °C
NBR soft low-backlash	65 ShoreA	Flexible black with white stripe	-30 °C ... +80 °C
NR for low temperature	80 ShoreA	Flexible black with orange stripe	-50 °C ... +50 °C
HNBR high temperature	80 ShoreA	Flexible black with red stripe	-10 °C ... +100 °C
Type N-EUPEX DK			
NBR hard	90 ShoreA	Flexible black with magenta stripe	-30 °C ... +80 °C
N-EUPEX DS series			
NBR hard	90 ShoreA	Flexible black	-30 °C ... +80 °C

The technical data do not include the flexible variants NBR low-backlash, HNBR high temperature and NR low temperature. Technical data, prices and article numbers can be found at www.flender.com

Standard types of N-EUPEX and N-EUPEX DS pin coupling


Type	Description
A	Fail-safe, 3-part
B	Fail-safe, 2-part
D	Fail-safe, 3-part, flange variant
E	Fail-safe, 2-part, flange variant
DK	Fail-safe, double-cardanic, with spacer
H	Fail-safe, with adapter
P	Fail-safe, 3-part, with brake drum
O	Fail-safe, 2-part, with brake drum
DBDR	Fail-safe, 3-part, with brake disk, brake disk radially dismountable
ABD	Fail-safe, 3-part, with brake disk
ADS	Non-fail-safe, 3-part
BDS	Non-fail-safe, 2-part
HDS	Non-fail-safe, with adapter

Special types of N-EUPEX pin coupling on request


Type	Description
AT	Fail-safe, 3-part, with Taper clamping bush
BT	Fail-safe, 2-part, with Taper clamping bush
F	Fail-safe, 3-part, with intermediate shaft
G	Fail-safe, 2-part, with intermediate shaft
K	Fail-safe, 3-part, with brake drum to customer's requirement
L	Fail-safe, 2-part, with brake drum to customer's requirement
M	Fail-safe, 2-part, with flange dimensions to SAE J620d
DBD	Fail-safe, 3-part, with brake disk
EBD	Fail-safe, 2-part, with brake disk

Further application-related coupling types are available. Dimension sheets for and information on these are available on request.

Modular principle of N-EUPEX types

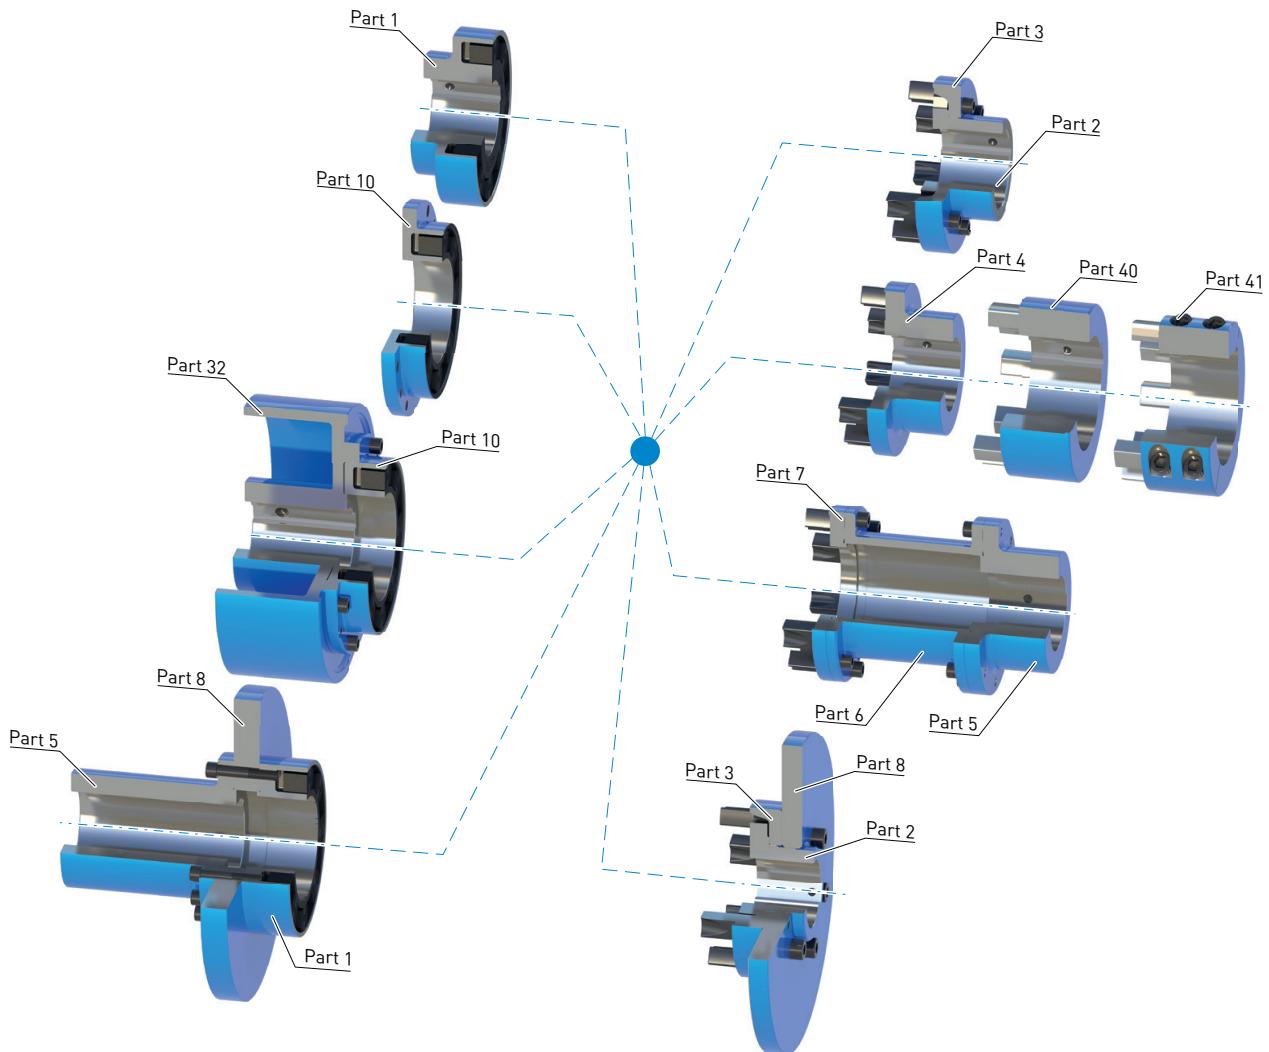

N-EUPEX DK

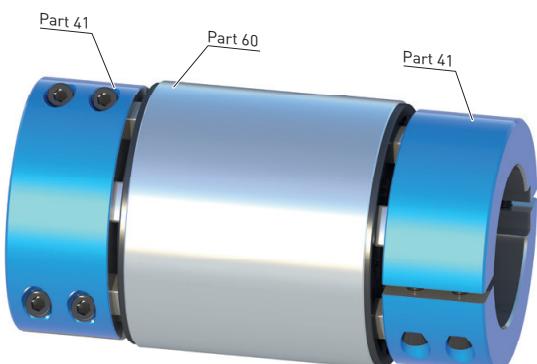


In the case of larger radial misalignment, a double-cardanic N-EUPEX coupling can be supplied in addition to the modular system. The spacer (part 60) is centered with the help of the N-EUPEX elastomer elements.


Any radial misalignment that emerges between the shaft ends will accordingly be equalized through a corresponding tilt angle in the elastomer joints with this two-joint version. The separated hubs (part 41) made from steel therefore facilitate simple installation.

GENERAL


Types N-EUPEX

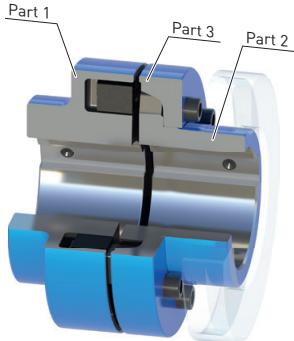


Types A and ADS

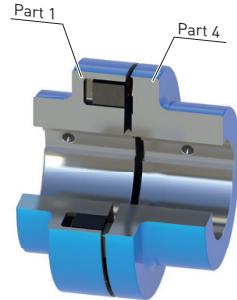

Types B and BDS

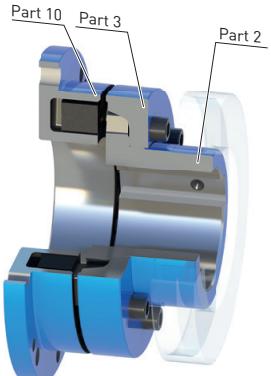


Type D

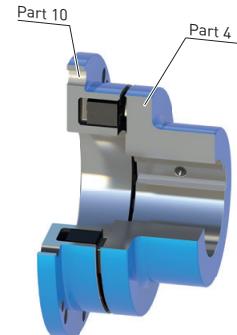


Type E


Types N-EUPEX with adapter

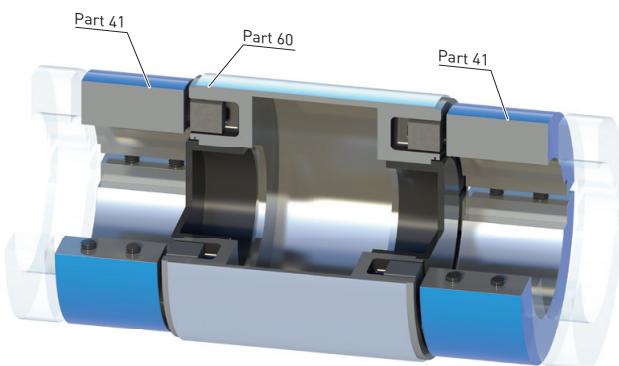


Type DK

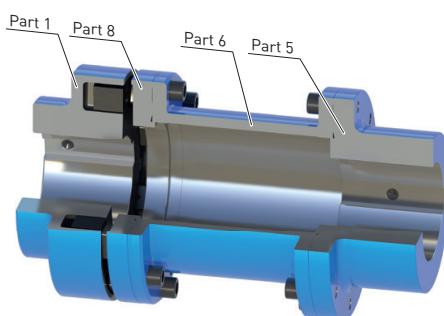


Types H and HDS

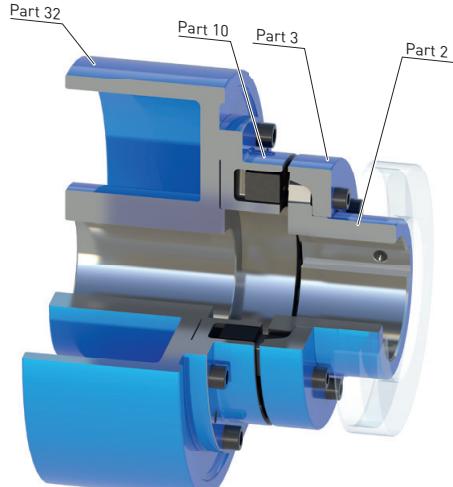Type N-EUPEX with brake disk/brake drum


Type P

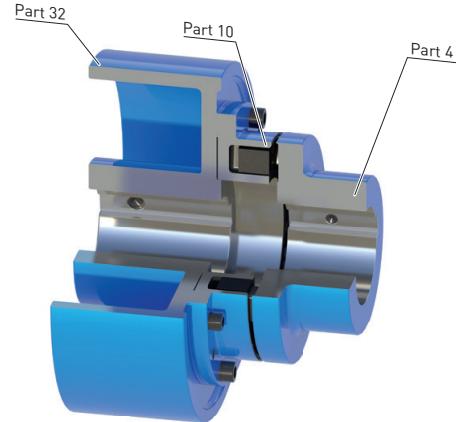

Type O

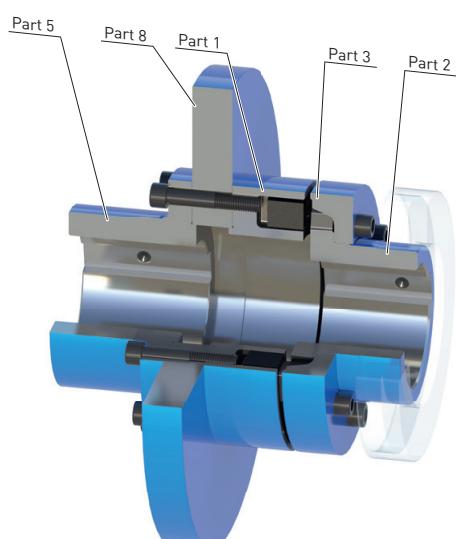

Type DBDR

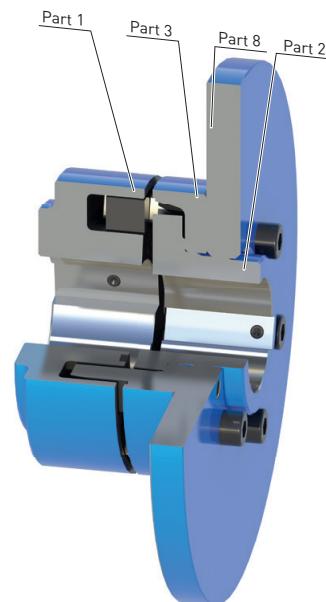

Type ABD

Note

- Further application-specific coupling types are available. Dimension sheets for and information on these are available on request.

GENERAL

Technical specifications, N-EUPEX series

Size	Rated torque for flexible type			Maximum torque		Torsional stiffness at 50 % capacity utilization for flexible type			Permitted shaft misalignment at speed ¹⁾ $n = 1500$ rpm	
	65 ShoreA T_{KN} Nm	80 ShoreA T_{KN} Nm	90 ShoreA T_{KN} Nm	65 ShoreA T_{Kmax} Nm	80/90 ShoreA T_{Kmax} Nm	65 ShoreA C_{Tdyn} 50 % kNm/rad	80 ShoreA C_{Tdyn} 50 % kNm/rad	90 ShoreA C_{Tdyn} 50 % kNm/rad	Radial ΔK_r mm	Angle ΔK_w °
58	12	28	34	36	70	0.22	0.75	1.51	0.2	0.15
68	23	48	58	69	120	0.42	1.26	2.79	0.2	0.15
80	40	85	100	120	212	1.13	3.21	6.81	0.2	0.12
95	69	140	160	207	350	1.77	5.32	10.86	0.2	0.12
110	110	225	270	330	562	2.70	8.15	17.47	0.2	0.10
125	165	345	400	495	862	4.0	12.3	25.5	0.25	0.10
140	250	500	600	750	1250	6.0	18	37.6	0.25	0.10
160	385	840	1000	1150	2100	12.2	39.4	82.8	0.3	0.10
180	600	1250	1500	1800	3125	20.6	63.6	135.5	0.3	0.10
200	935	1950	2300	2800	4875	34.2	106.8	216.6	0.3	0.09
225	1380	2300	2700	4150	5750	52	131	267	0.35	0.09
250	1930	3900	4600	5800	9750	73	221	451	0.35	0.08
280	2700	5500	6600	8100	13750	103	313	639	0.4	0.08
315	3850	7100	8500	11550	17750	186	472	1037	0.4	0.08
350	5335	10800	12900	16000	27000	255	708	1444	0.5	0.08
400	7150	14000	16800	21450	35000	343	997	2108	0.5	0.08
440	9350	19000	22800	28050	47500	427	1280	2943	0.6	0.08
480	11550	25100	30000	34650	62750	550	1781	3763	0.6	0.07
520	14630	32400	38800	43890	81000	650	2124	4485	0.65	0.07
560	20130	39000	46000	60390	97500	1095	3119	6899	0.65	0.07
610	26400	49000	58000	79200	122500	1422	3873	8542	0.75	0.07
660	33990	63000	75000	101970	157500	1799	4834	10689	0.8	0.07
710	42900	71000	85000	128700	177500	2339	5608	12225	0.9	0.07


For coupling fatigue torque:

$T_{KW} = 0.15 \cdot T_{KN}$, where $T_N > T_W$ must be adhered to.

N-EUPEX shaft distance S and radial misalignment ΔK_r


N-EUPEX (single-joint coupling)

Radial misalignment ΔK_r and angular misalignment ΔK_w as well as changes in gap dimension are equalized in a elastomer joint. Values for ΔS can be found in the respective type selection tables.

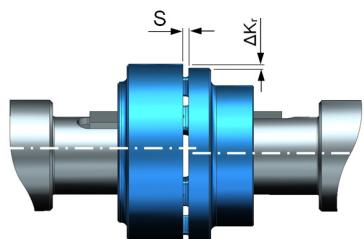

N-EUPEX DK (two-joint coupling)

Radial misalignment ΔK_r and angular misalignment ΔK_w as well as changes in gap dimension are equalized in two elastomer joints. Values for ΔS can be found in the corresponding type selection tables.

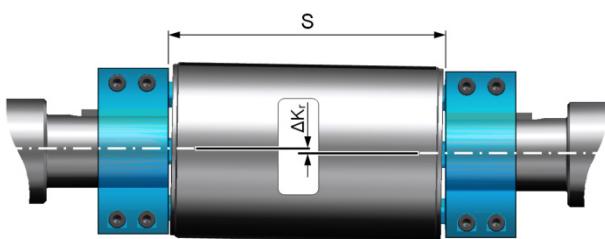

¹⁾ The maximum speed for the respective type must be noted. For additional information on the allowable shaft misalignment, please refer to the operating instructions.

Performance data for type N-EUPEX DK (two-joint coupling)									
Size	Rated torque 90 ShoreA T_{KN} Nm	Maximum torque 90 ShoreA T_{KN} Nm	Torsional stiffness at 50 % capacity utilization for flexible type 90 ShoreA C_{Tdyn} 50 % kNm/rad	Permitted shaft misalignment at $n = 1500$ rpm 1)					
				$S=100$ mm ΔK_{r100} mm	$S=140$ mm ΔK_{r140} mm	$S=180$ mm ΔK_{r180} mm	$S=200$ mm ΔK_{r200} mm	$S=250$ mm ΔK_{r250} mm	Angle ²⁾ ΔK_w °
68	48	120	1.18	1.2	-	-	-	-	0.20
80	85	212	2.95	1.2	1.7	-	-	-	0.20
95	140	350	4.84	1.1	1.6	-	-	-	0.20
110	225	562	7.44	1.0	1.5	2.1	-	-	0.20
125	345	862	11.2	1.0	1.5	2.0	2.3	-	0.10
140	500	1250	16.1	0.9	1.4	1.8	2.1	2.7	0.10
160	840	2100	35.4	-	1.3	1.8	2.1	2.7	0.10
180	1250	3125	57.6	-	1.3	1.8	2.0	2.6	0.10
200	1950	4875	93.5	-	1.2	1.7	2.0	2.6	0.10
225	2300	5750	118	-	-	1.7	1.9	2.6	0.10

For coupling fatigue torque:

$T_{KW} = 0.15 \cdot T_{KN}$, where $T_N > T_W$ must be adhered to.

Torsional stiffness and damping (single-joint or two-joint coupling)

The values stated in the above table apply to a capacity utilization of 50 %, an excitation amplitude of 10 % T_{KN} with frequency 10 Hz and an ambient temperature of 20 °C. The dynamic torsional stiffness is load-dependent and increases in proportion to capacity utilization. The following table shows the correction factors for different rated loads.

$$C_{Tdyn} = C_{Tdyn\ 50\%} \cdot FKC$$

	Load T_N / T_{KN}						
	20%	40%	50%	60%	70%	80%	100%
Correction factor FKC 65/80/90 ShoreA	0.50	0.82	1.00	1.20	1.40	1.63	2.10

The damping coefficient is $\Psi = 1.4$

Torsional stiffness and damping is further dependent on the ambient temperature and the frequency and amplitude of the torsional vibration excitation. More precise torsional stiffness and damping parameters on request.

With flexible couplings the manufacturing process of the rubber elements and their aging primarily influence the stiffness value C_{Tdyn} . For this reason calculation must be made with a tolerance for the dynamic stiffness of $\pm 20\%$. The specified damping coefficient Ψ is a minimum value with the result that the damping performance of the coupling corresponds at least to the specified value.

Permitted shaft misalignment (single-joint or two-joint coupling)

The permitted shaft misalignment depends on the operating speed. As the speed increases, lower shaft misalignment values are permitted. The correction factors for different speeds are specified in the following table. The maximum speed for the respective coupling size must be noted!

$$\Delta K_{perm} = \Delta K_{1500} \cdot FKV$$

	Speed in rpm			
	500	1000	1500	3000
Correction factor FKV	1.7	1.2	1.0	0.7

For fitting, the maximum gap dimension of $S_{max.} = S + \Delta S$ and the minimum gap dimension of $S_{min.} = S - \Delta S$ are permitted.

Shaft misalignments ΔK_r and ΔK_w may occur simultaneously.

¹⁾ The maximum speed for the respective type must be noted.
For additional information on the allowable shaft misalignment, please refer to the operating instructions.

²⁾ The angular misalignment ΔK_w refers to the maximum additional tilting of the shaft axes.

GENERAL


Assignment of N-EUPEX sizes to IEC standard motors (selected operating factor = 1.25) ¹⁾

Three-phase motor Size	Output at ≈ 3000 rpm		Output at ≈ 1500 rpm		Output at ≈ 1000 rpm		Output at ≈ 750 rpm		DE (ASII) shaft end D x E acc. to IEC	
	P _M kW	N-EUPEX size	P _M kW	N-EUPEX size	P _M kW	N-EUPEX size	P _M kW	N-EUPEX size	D mm	E mm
56	0.09	58	0.06	58					9	20
56	0.12	58	0.09	58					9	20
63	0.18	58	0.12	58					11	23
63	0.25	58	0.18	58					11	23
71	0.37	58	0.25	58					14	30
71	0.55	58	0.37	58					14	30
80	0.75	58	0.55	58	0.37	58			19	40
80	1.1	58	0.75	58	0.55	58			19	40
90 S	1.5	58	1.1	58	0.75	58			24	50
90 L	2.2	58	1.5	58	1.1	58			24	50
100 L	3	68	2.2	68	1.5	68	0.75	68	28	60
100 L			3	68			1.1	68	28	60
112 M	4	68	4	68	2.2	68	1.5	68	28	60
132 S	5.5	80	5.5	80	3	80	2.2	80	38	80
132 S	7.5	80							38	80
132 M			7.5	80	4	80	3	80	38	80
132 M					5.5	80			38	80
160 M	11	80	11	95	7.5	95	4	80	42	110
160 M	15	80					5.5	95	42	110
160 L	18.5	80	15	95	11	95	7.5	95	42	110
180 M	22	95	18.5	110					48	110
180 L			22	110	15	110	11	110	48	110
200 L	30	110	30	125	18.5	110	15	125	55	110
200 L	37	110			22	125			55	110
225 S									55	110
225 S			37	125			18.5	125	60	140
225 M	45	110							55	110
225 M			45	140	30	140	22	140	60	140
250 M	55	125							60	140
250 M			55	140	37	140	30	140	65	140
280 S	75	140							65	140
280 S			75	180	45	180	37	180	75	140
280 M	90	140							65	140
280 M			90	180	55	180	45	180	75	140
315 S	110	140							65	140
315 S			110	180	75	180	55	180	80	170
315 M	132	160							65	140
315 M			132	180	90	180	75	180	80	170
315 L	160	160							65	140
315 L	200	160							65	140
315 L			160	200	110	200	90	200	80	170
315 L			200	200	132	200	110	200	80	170
315 L					160	200	132	225	85	170
315	250	180							65	140
315	315	200							65	140
315			250	225	200	250			85	170
355	355	200							75	140
355	400	200							75	140
355	500	225							75	140

¹⁾ Outputs P_M of IEC motors and assigned N-EUPEX couplings (80 ShoreA)

TYPE A

for easy elastomer flexible replacement

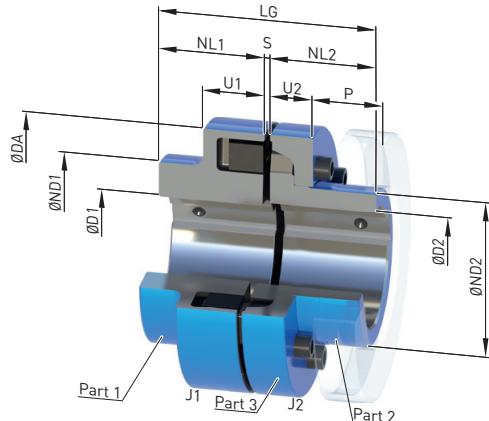

Size T_{KN} Nm	Rated torque flexible type 80 ShoreA	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1													Mass moment of inertia J_1/J_2 kgm ²	Article no. ¹⁾	Weight m kg		
				D1 min.	D1 max.	D2 min.	D2 max.	DA	ND1 ²⁾	ND2	NL1/ NL2	S	ΔS +/-	U1	U2	P	LG			
110	225	6300	—	55	—	45	—	110	86	62	40	3	1.0	34	20	33	83	0.002	2LC0170-4AB	2.7
125	345	6100	—	60	—	55	—	125	100	75	50	3	1.0	36	23	38	103	0.004	2LC0170-5AB	4.2
140	500	5800	—	65	—	60	—	140	100	82	55	3	1.0	34	28	43	113	0.007	2LC0170-6AB	5.6
160	840	5100	—	70	—	70	—	160	108	95	60	4	2.0	39	28	47	124	0.013	2LC0170-7AB	7.8
180	1250	4500	—	80	—	80	—	180	125	108	70	4	2.0	42	30	50	144	0.023	2LC0170-8AB	11
200	1950	4000	—	85	—	90	—	200	140	122	80	4	2.0	47	32	53	164	0.04	2LC0171-0AB	16
225	2300	3600	—	90	—	100	—	225	150	138	90	4	2.0	52	38	61	184	0.07	2LC0171-1AB	23
250	3900	3300	46	100	—	115	—	250	165	155	100	5.5	2.5	60	42	69	205.5	0.13	2LC0171-2AB	32
280	5500	3000	49	110	54	125	—	280	180	172	110	5.5	2.5	65	42	73	225.5	0.20	2LC0171-3AB	42
315	7100	2600	49	120	45	145	—	315	200	200	125	5.5	2.5	70	47	78	255.5	0.37	2LC0171-4AB	61
350	10800	2400	61	140	60	165	—	350	230	230	140	5.5	2.5	74	51	83	285.5	0.64	2LC0171-5AB	85
400	14000	2000	66	150	65	180	—	400	250	250	160	5.5	2.5	78	56	88	325.5	1.1	2LC0171-6AB	119
440	19000	1900	80	160	80	190	—	440	265	265	180	7.5	2.5	86	64	99	367.5	1.7	2LC0171-7AB	156
480	25100	1800	90	180	90	215	—	480	300	300	190	7.5	2.5	90	65	104	387.5	2.7	2LC0171-8AB	199
520	32400	1500	100	190	100	225	—	520	315	315	210	7.5	2.5	102	68	115	427.5	3.8	2LC0172-0AB	251
560	39000	1500	120	200	120	230	—	560	320	320	220	9	3.0	115	80	125	449	5.3	2LC0172-1AB	303
610	49000	1300	130	220	130	250	—	610	352	352	240	9	3.0	121	88	135	489	8.2	2LC0172-2AB	393
660	63000	1200	140	240	140	275	—	660	384	384	260	9	3.0	132	96	145	529	12.3	2LC0172-3AB	501
710	71000	1100	140	260	140	300	—	710	416	416	290	9	3.0	138	102	155	589	17.4	2LC0172-4AB	623

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX A coupling, size 200
- Part 1: Bore D1 65H7 mm, keyway to DIN 6885-1 and set screw
- Part 2: Bore D2 50H7 mm, keyway to DIN 6885-1 and set screw

Article no.: 2LC0171-0AB99-0AA0 L1F+M1C


¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

²⁾ The hub diameter HD1 can be smaller for small bores.

↗ For online configuration on [flender.com](#), click on the item no.

TYPE B

7

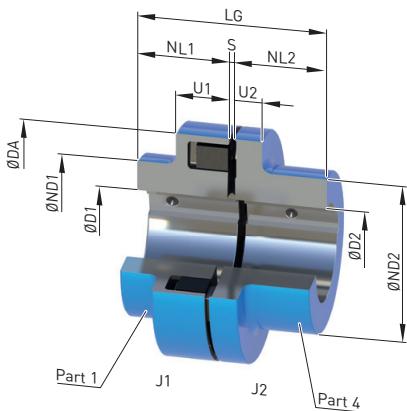

Size T_{KN} Nm	Rated torque flexible type 80 ShoreA	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1										Mass moment of inertia J_1/J_2 kgm ²	Article no. ¹⁾	Weight m				
			D1 min.	D1 max.	D2 ²⁾ min.	D2 ²⁾ max.	Part 4 ³⁾ max.	DA	ND1	ND2	NL1/ NL2	S	ΔS +/-	U1	U2	LG			
58 28	28	9000	—	24	—	25	32	58	58	40	20	3	1.0	20	8	43	0.0001	2LC0170-0AA	0.4
68 48	48	8400	—	28	—	30	40	68	68	50	20	3	1.0	20	8	43	0.0002	2LC0170-1AA	0.6
80 85	85	7200	—	38	—	42	48	80	80	68	30	3	1.0	30	10	63	0.0006	2LC0170-2AA	1.3
95 140	140	6600	—	48	—	48	60	95	76	76	35	3	1.0	30	12	73	0.0012	2LC0170-3AA	1.8
110 225	225	6300	—	55	—	55	70	110	86	86	40	3	1.0	34	14	83	0.0024	2LC0170-4AA	2.8
125 345	345	6100	—	60	—	60	82	125	100	100	50	3	1.0	36	18	103	0.005	2LC0170-5AA	4.7
140 500	500	5800	—	65	—	65	90	140	100	100	55	3	1.0	34	20	113	0.007	2LC0170-6AA	5.7
160 840	840	5100	—	70	—	70	105	160	108	108	60	4	2.0	39	20	124	0.01	2LC0170-7AA	7.8
180 1250	1250	4500	—	80	—	80	120	180	125	125	70	4	2.0	42	20	144	0.02	2LC0170-8AA	12
200 1950	1950	4000	—	85	—	85	130	200	140	140	80	4	2.0	47	24	164	0.04	2LC0171-0AA	17
225 2300	2300	3600	—	90	—	90	150	225	150	150	90	4	2.0	52	18	184	0.06	2LC0171-1AA	23
250 3900	3900	3300	46	100	46	100	170	250	165	165	100	5.5	2.5	60	18	205.5	0.11	2LC0171-2AA	30
280 5500	5500	3000	49	110	54	110	190	280	180	180	110	5.5	2.5	65	20	225.5	0.18	2LC0171-3AA	41

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX B coupling, size 95
- Part 1: Bore D1 42H7 mm, keyway to DIN 6885-1 and set screw
- Part 2: Bore D2 32H7 mm, keyway to DIN 6885-1 and set screw

Article no.: 2LC0170-3AA99-0AA0 L0X+M0T

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).


²⁾ The hub diameter HD1 can be smaller for small bores.

³⁾ Version with part 40 (jumbo hub) available on request.

⁴⁾ For online configuration on [flender.com](#), click on the item no.

TYPE DK

for large misalignment with simple installation and removal

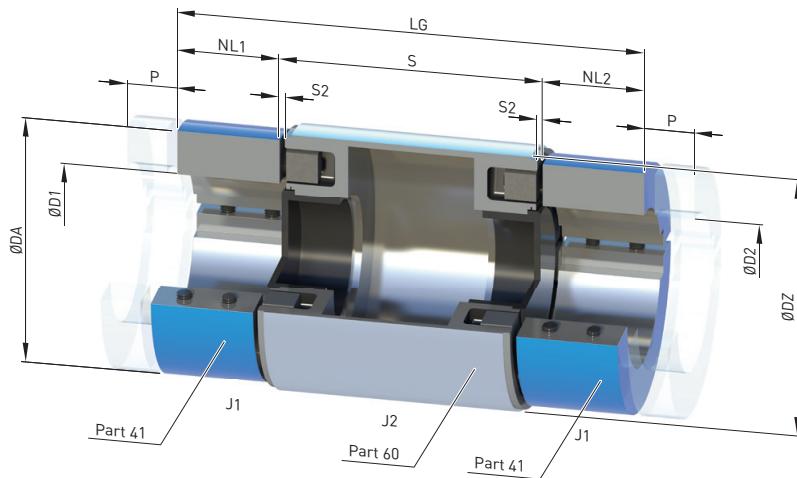

Size T_{KN}	Rated torque flexible type 90 ShoreA Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1 D1/D2 min. max.	Shaft distances S ²⁾ Preferred dimension				Available standard dimensions +/-				Mass moment of inertia kgm ²		Article no. ¹⁾ 2LC0170-1BA	Weight kg	
				DA	DZ	NL1/ NL2	P	LG	J ₁	J ₂		kgm ²	kgm ²			
68	48	5500	20 40	68	70	30	100		1	2	15	160	0.0004	0.0003	2LC0170-1BA	1.66
80	85	5300	25 48	80	86	34	100	140	1	2	16	168	0.001	0.001	2LC0170-2BA	2.64
95	140	5100	25 60	95	100	40	100	140	1	2	18	180	0.002	0.002	2LC0170-3BA	4.0
110	225	4800	30 70	110	120	45	100	140, 180	1	2	21	190	0.004	0.005	2LC0170-4BA	6.0
125	345	4600	30 82	125	130	50	140	100, 180, 200	1	2.5	24	240	0.008	0.007	2LC0170-5BA	8.2
140	500	4400	40 90	140	150	54	140	100, 180, 200, 250	1	2.5	26	248	0.013	0.014	2LC0170-6BA	11.8
160	840	4000	40 105	160	170	70	140	180, 200, 250	1.5	3	30	280	0.030	0.024	2LC0170-7BA	18.3
180	1250	3700	40 120	180	190	75	180	140, 200, 250	1.5	3	32	330	0.051	0.043	2LC0170-8BA	24.8
200	1950	3400	45 130	200	210	80	180	140, 200, 250	1.5	3.5	35	340	0.085	0.069	2LC0171-0BA	33.7
225	2300	3000	45 150	225	240	90	180	200, 250	1.5	3.5	39	360	0.152	0.123	2LC0171-1BA	46.9

Configurable variants¹⁾

- ØD1 With finished bore
- ØD2 With finished bore

Notes

- The total length, weight and mass moments of inertia apply to maximal bores and shaft distances according to the preferred dimension.
- Recommended share tolerances j6 to p6
- A combination of part 60 with other cam parts as part 41 is not permitted.

Ordering example

- N-EUPEX DK coupling, size 95, S = 100 mm
- Part 41-1: Bore D1 42 mm, with keyway as per DIN 6885-1, recommended shaft tolerances j6 to p6
- Part 41-2: Bore D1 32 mm, with keyway as per DIN 6885-1, recommended shaft tolerances j6 to p6

Article no.: 2LC0170-3BA99-0AA0 L0X+MOT


¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

²⁾ Special lengths on request.

↗ For online configuration on [flender.com](#), click on the item no.

TYPE H

7

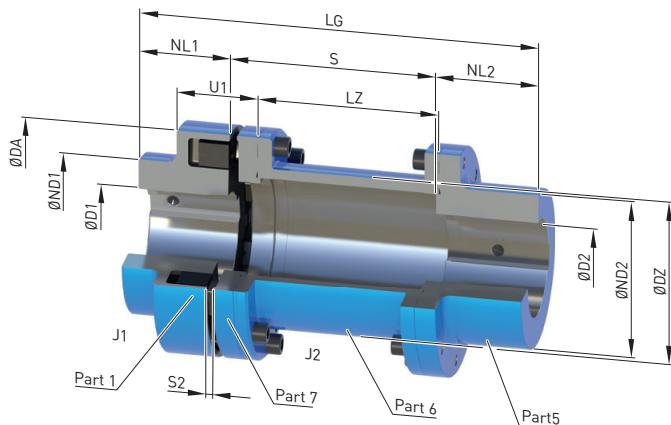

Size	Rated torque flexible type 80 ShoreA	Speed n_{Kmax}	Dimensions in mm Bore with keyway to DIN 6885-1													Mass moment of inertia	↗ Article no. ¹⁾	Weight m kg
				D1 min.	D2 max.	DA	ND1 ²⁾	ND2	NL1	NL2	S	LZ	DZ	LG	J ₁ kgm ²	J ₂ kgm ²		
80	85	7200	–	38	–	38	80	80	55	30	45	100 140	5 127	87 51	175 215	0.0006	0.001 2LC0170-2AG	2.4
95	140	6600	–	48	–	48	95	76	70	35	45	100 140	5 127	87 63	180 220	0.0009	0.003 2LC0170-3AG	3.3
110	225	6300	–	55	–	55	110	86	80	40	50	100 140	5 125	85 73	190 230	0.005 0.003	0.005 2LC0170-4AG	4.8
125	345	6100	–	60	–	60	125	100	90	50	50	100 140	5 125	85 85	200 240	0.01 0.01	0.01 2LC0170-5AG	6.9
140	500	5800	–	65	–	65	140	100	100	55	60	180 200 250	5 165 235	290 320 380	0.005 0.012 0.012	0.011 2LC0170-5AG	7.8	
											65	100 140 200 250	82 122 162 232	220 260 300 385	0.018 0.019 0.02 0.022	0.018 2LC0170-6AG	9.6	
											65	180 200	5 182	91	0.007 0.021	0.019 2LC0170-6AG	10.1	
											80	250	232	320	0.021	0.021 2LC0170-6AG	10.9	
															0.022	0.022 2LC0170-6AG	11.5	

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [fleender.com](#).

²⁾ The hub diameter HD1 can be smaller for small bores

↗ For online configuration on [fleender.com](#), click on the item no.

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1												Mass moment of inertia J_1 kgm^2	↗ Article no. ¹⁾	Weight m kg			
				D1 min.	D2 min.	DA	ND1 ²⁾	ND2	NL1	NL2	S	S2	LZ	DZ	LG					
160	840	5100		70	-	70	160	108	108	60	70	100	81.5	230	0.03	2LC0170-7AG	12.5			
							70	180	6	111	161.5	121.5	270	0.032	2LC0170-7AG	13				
							70	200			181.5		310	0.013	0.034	2LC0170-7AG	14			
							80	250			231.5		330	0.035	0.037	2LC0170-7AG	15			
180	1250	4500		80	-	80	180	125	125	70	80	140	121.5	290	0.053	2LC0170-8AG	18			
							180	6			161.5	180	330	0.023	0.057	2LC0170-8AG	19			
							200				181.5	131	350	0.059	0.064	2LC0170-8AG	20			
							250				231.5		400			2LC0170-8AG	21			
200	1950	4000		85	-	90	200	140	140	80	90	140	118.5	310	0.094	2LC0171-0AG	25			
							180	6			158.5	144	350	0.04	0.099	2LC0171-0AG	26			
							200				178.5		370		0.104	2LC0171-0AG	27			
							250				228.5		420		0.109	2LC0171-0AG	28			
225	2300	3600		90	-	95	225	150	150	90	100	140	118.5	330	0.157	2LC0171-1AG	33			
							180	6			158.5	169	370	0.07	0.16	2LC0171-1AG	34			
							200				178.5		390		0.17	2LC0171-1AG	35			
							250				228.5		440		0.18	2LC0171-1AG	37			
250	3900	3300		100	46	100	250	165	165	100	110	180	152.5	390	0.27	2LC0171-2AG	48			
							200	8			172.5	185	410	0.12	0.28	2LC0171-2AG	50			
280	5500	3000		110	49	110	51	130	280	180	180	110	120	222.5	215	0.20	0.51	2LC0171-3AG	67	
							315	200	200	125	140	250	8	222.5	250	0.35	0.85	2LC0171-4AG	96	
							350	230	230	140	150	250	8	220.5	272	0.61	1.4	2LC0171-5AG	120	
315	7100	2600	49	120	51	140	350	230	230	140	150	250	8	220.5	310	0.90	2.8	2LC0171-6AG	190	
350	10800	2400	61	140	51	160	350	230	230	140	150	250	8	185.5	250	0.61	1.4	2LC0171-7AG	219	
400	14000	2000	66	150	51	180	400	250	250	160	180	250	8	185.5	310	0.90	2.8	2LC0171-7AG	219	
440	19000	1900	80	160	51	190	440	265	265	180	180	250	10	182	354	0.61	1.7	4.0	2LC0171-7AG	219

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- For dimension U1, see type A on page Page 7/11.
- During assembly, the gap dimension S2 must not exceed the permissible tolerance of +1 mm.
- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX H coupling, size 160, S = 200 mm
- Part 1: Bore D1 60H7 mm, keyway to DIN 6885-1 and set screw
- Part 2: Bore D2 55H7 mm, keyway to DIN 6885-1 and set screw

Article no.: 2LC0170-7AG99-0AD0 L1E+M1D


¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [fleender.com](#).

²⁾ The hub diameter HD1 can be smaller for small bores

↗ For online configuration on [fleender.com](#), click on the item no.

TYPE D

for easy elastomer flexible replacement

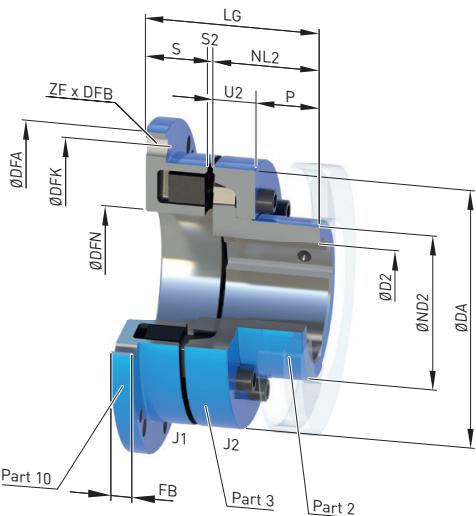

7

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1	Flange connection dimensions										Mass moment of inertia J_1 kgm ²	Article no. ¹⁾	Weight m kg					
				D2 min.	DA max.	ND2	NL2	S	ΔS +/-	S2	LG	DFA h8	DFN H7	DFK	FB	ZF	DFB				
110	225	6300	–	45	110	62	40	30	1.0	3	70	144	62	128	10	6	9 M8	0.0033	0.002	2LC0170-4AD1 2LC0170-4AD2	2.6
125	345	6000	–	55	125	75	50	34	1.0	3	84	158	75	142	10	6	9 M8	0.005	0.004	2LC0170-5AD1 2LC0170-5AD2	3.5
140	500	5300	–	60	140	82	55	37	1.0	3	92	180	82	160	13	6	11 M10	0.010	0.007	2LC0170-6AD1 2LC0170-6AD2	5.4
160	840	4800	–	70	160	95	60	43	2.0	4	103	200	95	180	13	7	11 M10	0.016	0.013	2LC0170-7AD1 2LC0170-7AD2	7.1
180	1250	4300	–	80	180	108	70	46	2.0	4	116	220	110	200	13	8	11 M10	0.025	0.023	2LC0170-8AD1 2LC0170-8AD2	9.5
200	1950	3900	–	90	200	122	80	51	2.0	4	131	248	120	224	16	8	14 M12	0.049	0.04	2LC0171-0AD1 2LC0171-0AD2	14
225	2300	3600	–	100	225	138	90	56	2.0	4	146	274	135	250	16	8	14 M12	0.076	0.07	2LC0171-1AD1 2LC0171-1AD2	19
250	3900	3000	–	115	250	155	100	65.5	2.5	5.5	165.5	314	150	282	20	8	18 M16	0.15	0.13	2LC0171-2AD1 2LC0171-2AD2	28
280	5500	3000	54	125	280	172	110	70.5	2.5	5.5	180.5	344	170	312	20	8	18 M16	0.23	0.2	2LC0171-3AD1 2LC0171-3AD2	35

Configurable variants¹⁾

- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flenner.com.

↗ For online configuration on flenner.com, click on the item no.

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1 D2 min. max.	Flange connection dimensions										Mass moment of inertia J_1 kgm ²	↗ Article no. ¹⁾	Weight m kg			
				DA	ND2	NL2	S	ΔS +/-	S2	LG	DFA h8	DFN H7	DFK	FB	ZF	DFB			
315	7100	2500	45	145	315	200	125	75.5	2.5	5.5	200.5	380	200	348	22	9	18 M16	0.4	0.37 2LC0171-4AD1 2LC0171-4AD2
350	10800	2200	60	165	350	230	140	79.5	2.5	5.5	219.5	430	225	390	25	9	22 M20	0.7	0.64 2LC0171-5AD1 2LC0171-5AD2
400	14000	2000	65	180	400	250	160	83.5	2.5	5.5	243.5	480	265	440	25	10	22 M20	1.1	1.1 2LC0171-6AD1 2LC0171-6AD2
440	19000	1800	80	190	440	265	180	93.5	2.5	7.5	273.5	520	295	480	25	10	22 M20	1.6	1.7 2LC0171-7AD1 2LC0171-7AD2
480	25100	1800	90	215	480	300	190	97.5	2.5	7.5	287.5	575	325	528	30	10	26 M24	2.6	2.7 2LC0171-8AD1 2LC0171-8AD2
520	32400	1500	100	225	520	315	210	109.5	2.5	7.5	319.5	615	355	568	30	10	26 M24	3.6	3.8 2LC0172-0AD1 2LC0172-0AD2

Configurable variants¹⁾

- ØD2 Without finished bore
With finished bore

Notes

- For dimensions U2 and P, see type A on page [Page 7/11](#).
- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX D coupling, size 125
- Part 10: with through bores
- Part 2: Bore D2 38H7 mm, with keyway to DIN 6885-1 and set screw


Article no.: 2LC0170-5AD19-0AA0 MOV

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

TYPE E

7

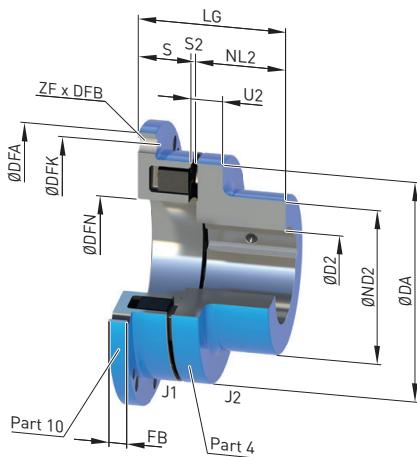

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1 D2 min. max.	Flange connection dimensions										Mass moment of inertia J_1 kgm ²	Article no. ¹⁾	Weight m kg		
				DA	ND2	NL2	S	ΔS +/-	S2	LG	DFA h8	DFN H7	DFK	FB	ZF	DFB		
68	48	8400	– 30	68	50	20	23	1.0	3	43	90	34	80	7	6	5.5 M5	0.0004	0.0002
																2LC0170-1AC1		0.7
																2LC0170-1AC2		
80	85	7200	– 42	80	68	30	24	1.0	3	54	106	42	94	8	6	6.6 M6	0.0008	0.0006
																2LC0170-2AC1		1.2
																2LC0170-2AC2		
95	140	6600	– 48	95	76	35	27	1.0	3	62	120	52	108	8	6	6.6 M6	0.0013	0.0012
																2LC0170-3AC1		1.7
																2LC0170-3AC2		
110	225	6300	– 55	110	86	40	30	1.0	3	70	144	62	128	10	6	9 M8	0.0033	0.0024
																2LC0170-4AC1		2.6
																2LC0170-4AC2		
125	345	6000	– 60	125	100	50	34	1.0	3	84	158	75	142	10	6	9 M8	0.005	0.005
																2LC0170-5AC1		4.0
																2LC0170-5AC2		
140	500	5300	– 65	140	100	55	37	1.0	3	92	180	82	160	13	6	11 M10	0.010	0.007
																2LC0170-6AC1		5.5
																2LC0170-6AC2		
160	840	4800	– 70	160	108	60	43	2.0	4	103	200	95	180	13	7	11 M10	0.016	0.01
																2LC0170-7AC1		7.1
																2LC0170-7AC2		

Configurable variants¹⁾

- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1 D2 min. max.	Flange connection dimensions										Mass moment of inertia J_1 kgm ²	↗ Article no. ¹⁾	Weight m kg				
				DA	ND2	NL2	S	ΔS +/-	S2	LG	DFA h8	DFN H7	DFK	FB	ZF	DFB				
180	1250	4300	–	80	180	125	70	46	2.0	4	116	220	110	200	13	8	<u>11</u> M10	0.025	0.02	<u>2LC0170-8AC1</u> <u>2LC0170-8AC2</u> 10
200	1950	3900	–	85	200	140	80	51	2.0	4	131	248	120	224	16	8	<u>14</u> M12	0.049	0.04	<u>2LC0171-0AC1</u> <u>2LC0171-0AC2</u> 15
225	2300	3600	–	90	225	150	90	56	2.0	4	146	274	135	250	16	8	<u>14</u> M12	0.076	0.06	<u>2LC0171-1AC1</u> <u>2LC0171-1AC2</u> 19
250	3900	3000	46	100	250	165	100	65.5	2.5	5.5	165.5	314	150	282	20	8	<u>18</u> M16	0.15	0.11	<u>2LC0171-2AC1</u> <u>2LC0171-2AC2</u> 26
280	5500	3000	54	110	280	180	110	70.5	2.5	5.5	180.5	344	170	312	20	8	<u>18</u> M16	0.23	0.18	<u>2LC0171-3AC1</u> <u>2LC0171-3AC2</u> 34

Configurable variants¹⁾

- ØD2 Without finished bore
With finished bore

Notes

- For dimension U2, see type B on page [Page 7/12](#).
- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX E coupling, size 125
- Part 10: with through bores
- Part 4: Bore D2 38H7 mm, with keyway to DIN 6885-1 and set screw

Article no.: **2LC0170-5AC19-0AA0 M0V**


¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

TYPE P

with brake drum

7

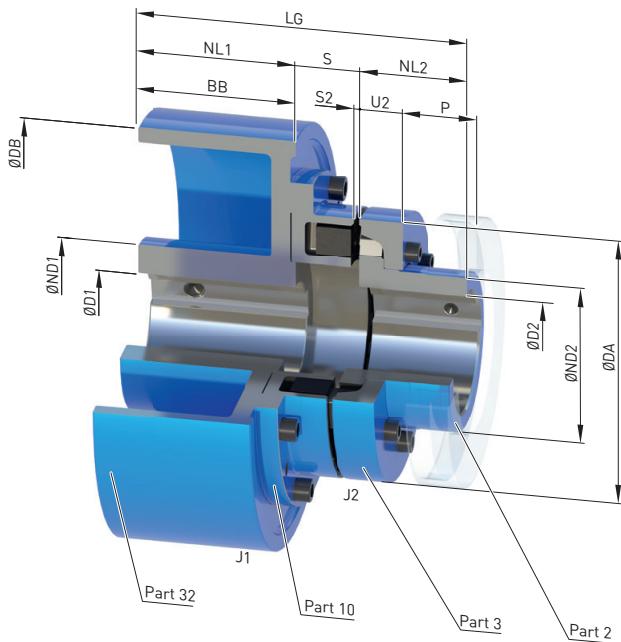

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1													Mass moment of inertia J_1 kgm ²	↗ Article no. ¹⁾	Weight m kg				
				D1 min.	D2 max.	DA	ND1	ND2	NL1/BB	NL2	S	ΔS +/-	S2	DB	U2	LG						
125	345	4800	—	55	—	55	125	84	75	75	50	31	1.0	3	200	23	156	0.043	0.004	2LC0170-5AF	11	
140	500	3800	—	60	—	60	140	128	82	95	55	34	1.0	3	250	28	184	0.13	0.007	2LC0170-6AF	21	
160	840	3800	—	70	—	70	160	128	95	95	60	40	2.0	4	250	28	195	0.14	0.013	2LC0170-7AF	21	
180	1250	3800	—	80	—	80	180	128	108	95	41	—	2.0	4	250	30	206	0.16	0.023	2LC0170-8AF	27	
		3000	—	80	—	80	128	118	43	43	315	30	231	0.35	315	246	0.37	2LC0170-8AF	34			
200	1950	3000	—	80	—	90	200	160	122	118	48	—	2.0	4	315	32	278	0.37	2LC0171-0AF	39		
		2400	—	90	—	90	175	190	80	48	400	32	500	318	32	400	38	293	1.1	0.04	2LC0171-0AF	59
		1900	—	110	—	100	225	160	138	118	48	—	2.0	4	315	38	259	0.39	2LC0171-0AF	97		
225	2300	3000	—	80	—	100	225	160	138	150	51	—	2.0	4	400	38	333	0.07	2LC0171-1AF	46		
		2400	—	90	—	100	175	190	90	53	500	38	500	333	3.1	400	38	333	0.07	2LC0171-1AF	64	
		1900	38	110	—	110	—	—	—	53	500	38	500	333	3.1	500	38	333	0.07	2LC0171-1AF	103	

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

Size	Rated torque flexible type 80 ShoreA $T_{K\max}$ Nm	Speed $n_{K\max}$ rpm	Dimensions in mm												Mass moment of inertia J_1 kgm ²	↗ Article no. ¹⁾	Weight m kg				
			Bore with keyway to DIN 6885-1			D1 min.	D2 max.	DA	ND1	ND2	NL1/BB	NL2	S	ΔS +/-	S2	DB	U2	LG			
			D1 min.	D2 max.	DA	ND1	ND2	NL1/BB	NL2	S	ΔS +/-	S2	DB	U2	LG	J_1 kgm ²	J_2	m kg			
250	3900	2400	—	100	—	115	250	160	155	150	100	62.5	2.5	5.5	400	42	312.5	1.16	0.13	2LC0171-2AF	74
		1900	38	110	—	115	250	175	190	190	110	62.5	—	—	500	42	352.5	2.9	0.13	2LC0171-2AF	111
280	5500	2400	—	100	—	125	280	160	150	150	110	65.5	—	—	400	—	325.5	1.24	—	2LC0171-3AF	82
		1900	48	110	54	125	280	175	172	190	110	67.5	2.5	5.5	500	42	367.5	3.1	0.2	2LC0171-3AF	115
		1500	48	110	—	—	—	175	—	236	—	67.5	—	—	630	—	413.5	8.0	—	2LC0171-3AF	168
315	7100	2400	—	100	—	145	315	160	150	150	125	72.5	—	—	400	—	347.5	1.4	—	2LC0171-4AF	92
		1900	48	110	45	145	315	175	190	190	125	72.5	2.5	5.5	500	47	387.5	3.3	0.37	2LC0171-4AF	131
		1500	48	110	—	—	—	175	236	236	—	72.5	—	—	630	—	433.5	8.2	—	2LC0171-4AF	180
		1300	55	120	—	—	—	192	—	265	—	72.5	—	—	710	—	462.5	14.2	—	2LC0171-4AF	233
350	10800	1500	48	110	60	165	350	175	230	236	140	76.5	2.5	5.5	630	51	452.5	8.5	0.64	2LC0171-5AF	197
		1300	55	120	—	—	—	192	—	265	—	76.5	—	—	710	—	481.5	14.6	—	2LC0171-5AF	251

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- For dimension P, see type A on page **Page 7/11**.
- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX P coupling, size 200, brake drum 315 x 118 mm
- Part 32: Bore D1 55H7 mm, keyway to DIN 6885-1 P9 and set screw
- Part 4: Bore D2 60H7 mm, keyway to DIN 6885-1 and set screw
- Coupling micro-balanced G 6.3 at 1500 rpm in accordance with half parallel key standard

Article no.: 2LC0171-0AF99-0DA0-Z L1D+M1E+W02+Y95


Plain text to Y95: G 6.3, n = 1500 rpm

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

TYPE O

with brake drum

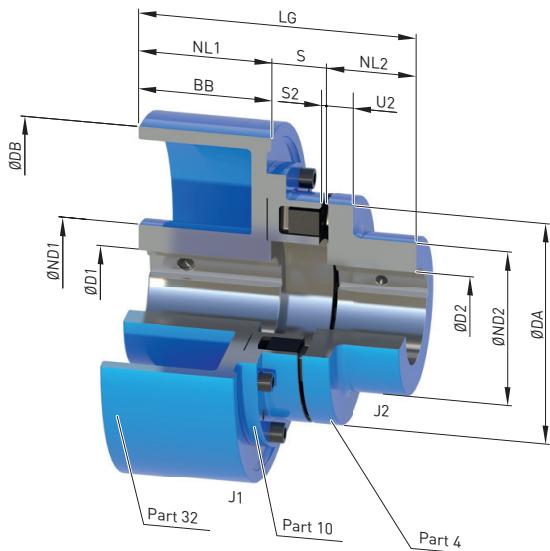

7

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1													Mass moment of inertia J_1 kgm ²	↗ Article no. ¹⁾	Weight m kg			
				D1 min.	D2 max.	DA	ND1	ND2	NL1/BB	NL2	S	ΔS +/-	S2	DB	U2	LG					
125	345	4800	—	55	—	60	125	84	100	75	50	31	1.0	3	200	18	156	0.043	0.005	2LC0170-5AE	11
140	500	3800	—	60	—	65	140	128	100	95	55	34	1.0	3	250	20	184	0.13	0.007	2LC0170-6AE	22
160	840	3800	—	70	—	70	160	128	108	95	60	40	2.0	4	250	20	195	0.14	0.01	2LC0170-7AE	24
180	1250	3800	—	80	—	80	180	128	125	95	70	41	2.0	4	250	20	206	0.16	0.02	2LC0170-8AE	28
		3000	—	80	—	80	180	128	125	118	70	43	2.0	4	315	20	231	0.35	0.02	2LC0170-8AE	35
200	1950	3000	—	80	—	85	200	160	140	150	80	48	2.0	4	315	24	246	0.37	0.04	2LC0171-0AE	40
		2400	—	90	—	85	200	160	140	150	80	48	2.0	4	400	24	278	1.10	0.04	2LC0171-0AE	60
		1900	—	110	—	85	175	190	190	190	48	—	—	—	500	318	2.80	—	—	2LC0171-0AE	98

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flender.com.

↗ For online configuration on flender.com, click on the item no.

Size	Rated torque flexible type 80 ShoreA T_{kN} Nm	Speed n_{kmax} rpm	Dimensions in mm												Mass moment of inertia J_1 kgm^2	\triangleright Article no. ¹⁾	Weight m kg						
			Bore with keyway to DIN 6885-1		D1 min.	D1 max.	D2 min.	D2 max.	DA	ND1	ND2	NL1/BB	NL2	S	ΔS +/-	S2	DB	U2	LG				
225	2300	3000	-	80					128	118		51			315	259	0.39	2LC0171-1AE	45				
		2400	-	90	-	90			225	160	150	150	90	53	2.0	4	400	18	293	1.10	0.06	2LC0171-1AE	63
		1900	38	110					175	190		53			500	333	3.10	2LC0171-1AE	102				
250	3900	2400	-	100			46	100	250	160	165	150	100	62.5	2.5	5.5	400	18	312.5	1.16	0.11	2LC0171-2AE	73
		1900	38	110					175	190		62.5			500	352.5	2.90		0.11	2LC0171-2AE	108		
280	5500	2400	-	100					280	160	150			65.5			400		325.5	1.24		2LC0171-3AE	82
		1900	48	110			54	110	280	175	180	190	110	67.5	2.5	5.5	500	20	367.5	3.10	0.18	2LC0171-3AE	115
		1500	48	110						175	236		67.5			630	413.5	8.0			2LC0171-3AE	168	

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX O coupling, size 200, brake drum 315 x 118 mm
- Part 32: Bore D1 55H7 mm, keyway to DIN 6885-1 P9 and set screw
- Part 4: Bore D2 60H7 mm, keyway to DIN 6885-1 and set screw
- Coupling micro-balanced G 6.3 at 1500 rpm in accordance with half parallel key standard

Article no.: 2LC0171-0AE99-0DA0-Z L1D+M1E+W02+Y95

Plain text to Y95: G 6.3, n = 1500 rpm


¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

\triangleright For online configuration on [flender.com](#), click on the item no.

TYPE DBDR

with brake disk

7

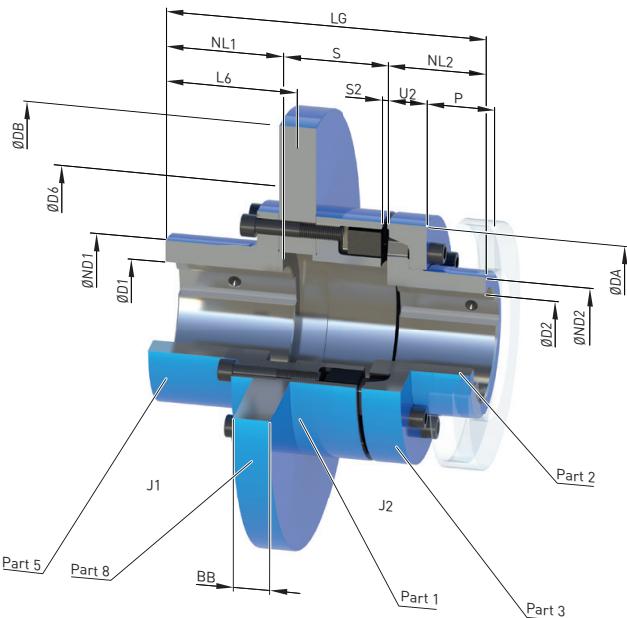

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Dimensions in mm													Mass moment of inertia	↗ Article no. ¹⁾	Weight m kg					
		Bore with keyway to DIN 6885-1			DA	D1 max.	D2 min.	ND1	ND2	NL1	NL2	S ²⁾ +/-	S2	DB ²⁾ min.	D6 min.	BB ²⁾	L6	LG				
140	500	60	-	60	140	85	82	72	55	54.35	57.5	1.0	3	315	150	12.7	74	181.35	0.11	0.008	2LC0170-6AV	14.7
								72	55	188	73					15	76	184.5	0.13			16.2
								90	60	58.35	62.5	2.0	4	315	170	12.7	91	208.35	0.12			26.9
								188	78							30	200	316	0.24			18.5
160	840	75	-	70	160	105	95	90	60	62.5	67.35					15	94	212.5	0.14	0.013	2LC0170-7AV	20
								90	60	188	80					30	200	326	0.26			31
180	1250	90	-	80	180	125	108	90	70	60.35	64.5	2.0	4	315	190	12.7	91	220.35	0.35			25
								90	70	188	80					30	200	338	0.57			42
200	1950	95	-	90	200	135	122	95	80	67.35	70.5	2.0	4	355	210	12.7	97	242.35	0.32			32
								95	80	188	86					15	99	245.5	0.36	0.04	2LC0171-0AV	35
																30	200	354	0.67			54

Configurable variants¹⁾

- ØD1 With finished bore
- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

²⁾ For the available DB·BB brake disk dimensions, please refer to the product configurator on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Dimensions in mm													Mass moment of inertia J_1 min. kgm ²	↗ Article no. ¹⁾	Weight m kg					
		Bore with keyway to DIN 6885-1			D1	D2	DA	ND1	ND2	NL1	NL2	S	ΔS +/-	S2	DB ²⁾ min.	D6 min.	BB ²⁾	L6	LG			
225	2300	115	-	100	225	160	138	100	90	74.5	72.35	2.0	4	400	235	12.7	103	262.35	0.52	0.08	2LC0171-1AV	43
								100	90	90	90				15	104	264.5	0.59			46	
								188							30	200	368	1.1			71	
250	3900	120	-	115	250	170	155	105	100	86.5	83.35	+2/-3	6	450	260	12.7	107	288.35	1.6	0.12	2LC0171-2AV	56
								105	100	102	102				15	109	291.5	1.7			59	
								188							30	200	390	2.5			88	
280	5500	140	54	125	280	200	172	120	110	90.5	87.35	+2/-3	6	500	350	12.7	122	317.35	1.3	0.19	2LC0171-3AV	73
								120	110	106	106				15	124	320.5	1.5			77	
								188							30	200	404	2.7			112	
315	7100	140	45	145	315	200	200	130	125	92.5	87.35	+2/-3	6	500	350	12.7	130	342.35	2.1	0.33	2LC0171-4AV	95
								130	125	108	108				15	134	347.5	2.3			100	
								188							30	200	421	4.2			140	
350	10800	165	60	165	350	230	230	135	140	101.5	97.35	+2/-3	6	500	360	12.7	136	372.35	3.3	0.57	2LC0171-5AV	129
								135	140	117	117				15	139	376.5	3.8			134	
								188							30	200	445	6.7			184	

Configurable variants¹⁾

- ØD1 With finished bore
- ØD2 Without finished bore
 - With finished bore

Notes

- For dimensions U2 and P, see type A on page **Page 7/11**.
- Weights and mass moments of inertia apply to maximum bores.
- Maximum speed $n_{\text{max}} = 1528/\text{DB}$ [n_{max} in rpm, DB in m] Observe maximum speed of type A.
- Other brake disk diameters DB and brake disk widths BB on request.

Ordering example

- N-EUPEX DBDR coupling, size 200, brake disk 450 x 30 mm
- Part 5: Bore D1 55H7 mm, keyway to DIN 6885-1 P9 and set screw
- Part 2: Bore D2 60H7 mm, keyway to DIN 6885-1 and set screw
- Coupling micro-balanced G 6.3 at 1500 rpm in accordance with half parallel key standard

Article no.: 2LC0171-0AV99-0GA0-Z L1D+M1E+W02+Y95

Plain text to Y95: G 6.3, n = 1500 rpm


¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

²⁾ For the available DB · BB brake disk dimensions, please refer to the product configurator on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

TYPE ABD

with brake disk

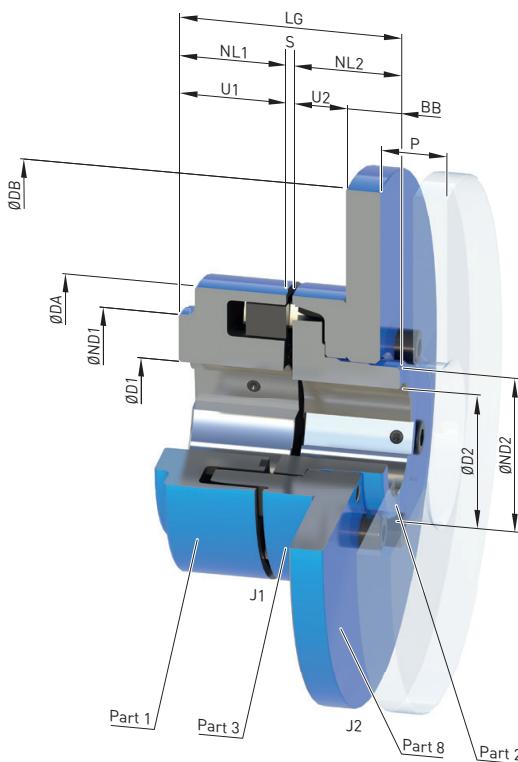

Size	Rated torque flexible type 80 ShoreA T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm Bore with keyway to DIN 6885-1												Mass moment of inertia J_1 kgm ²	\triangleright Article no. ¹⁾	Weight m kg					
			D1 min.	D1 max.	D2 min.	D2 max.	DA	ND1 ²⁾	ND2	NL1/ NL2	S	ΔS +/-	U1	U2	P	DB ³⁾ min.	BB ³⁾	LG				
140	500	5500	—	65	—	60	140	100	82	55	3	1.0	34	28	43	315	12.7	113	0.007	0.10	2LC0170-6BB	12.8
160	840	5100	—	70	—	70	160	108	95	60	4	2.0	39	28	47	315	12.7	124	0.013	0.11	2LC0170-7BB	14.8
180	1250	4500	—	80	—	80	180	125	108	70	4	2.0	42	30	50	355	12.7	144	0.023	0.18	2LC0170-8BB	20
200	1950	4000	—	85	—	90	200	140	122	80	4	2.0	47	32	53	400	12.7	164	0.04	0.29	2LC0171-0BB	27
225	2300	3600	—	90	—	100	225	150	138	90	4	2.0	52	38	61	450	30	184	0.07	1.0	2LC0171-1BB	57
250	3900	3300	46	100	—	115	250	165	155	100	5.5	2.5	60	42	69	500	30	205.5	0.13	1.6	2LC0171-2BB	73
280	5500	3000	49	110	54	125	280	180	172	110	5.5	2.5	65	42	73	560	30	225.5	0.20	2.5	2LC0171-3BB	94
315	7100	2600	49	120	45	145	315	200	200	125	5.5	2.5	70	47	78	630	30	255.5	0.37	4.0	2LC0171-4BB	126
350	10800	2400	61	140	60	165	350	230	230	140	5.5	2.5	74	51	83	710	30	285.5	0.64	6.5	2LC0171-5BB	167

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX ABD coupling, size 200, brake disk 400 x 12.7 mm
- Part 1: Bore D1 65H7 mm, keyway to DIN 6885-1 and set screw
- Part 2: Bore D2 50H7 mm, keyway to DIN 6885-1 P and set screw
- Coupling micro-balanced G 6.3 at 1500 rpm in accordance with half parallel key standard

Article no.: 2LC0171-0BB99-2FA0-Z L1F+M1C+W02+Y95

Plain text to Y95: G 6.3, n = 1500 rpm

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on flen더.com.

²⁾ The hub diameter HD1 can be smaller for small bores.

³⁾ For the available DB·BB brake disk dimensions, please refer to the product configurator on flen더.com.

⁴⁾ For online configuration on flen더.com, click on the item no.

GENERAL

Technical specifications, N-EUPEX DS series

Power ratings of the N-EUPEX DS series						
Size	Rated torque T_{KN} Nm	Maximum torque T_{Kmax} Nm	Torsional stiffness at 50 % capacity utilization ¹⁾ C_{Tdyn} kNm/rad	Assembly Gap dimension ²⁾ ΔS mm	Permitted shaft misalignment at speed ³⁾ $n = 1500$ rpm Radial ΔK_r mm	Angle ΔK_w °
66	19	38	0.73	1.0	0.2	0.15
76	34	68	1.36	1.0	0.2	0.15
88	60	120	2.62	1.0	0.2	0.12
103	100	200	4.00	1.0	0.2	0.12
118	160	320	6.30	1.0	0.2	0.10
135	240	480	10.5	1.0	0.25	0.10
152	360	720	13.6	1.0	0.25	0.10
172	560	1120	27.2	2.0	0.3	0.10
194	880	1760	47.0	2.0	0.3	0.10
218	1340	2680	70.0	2.0	0.3	0.09
245	2000	4000	106	2.0	0.35	0.09
272	2800	5600	149	2.5	0.35	0.08
305	3900	7800	214	2.5	0.4	0.08
340	5500	11000	350	2.5	0.4	0.08
380	7700	15400	480	2.5	0.5	0.08
430	10300	20600	730	2.5	0.5	0.08
472	13500	27000	990	2.5	0.6	0.08
514	16600	33200	1270	2.5	0.6	0.07
556	21200	42400	1540	2.5	0.65	0.07

For coupling fatigue torque:

$T_{KW} = 0,15 \cdot T_{KN}$, where $T_N > T_W$ must be adhered to.

Note

For fitting, the maximum gap dimension of $S_{max.} = S + \Delta S$ and the minimum gap dimension of $S_{min.} = S - \Delta S$ are permitted.


¹⁾ The correction factors for torsion spring stiffness and permitted shaft misalignment correspond to the specifications for the puncture-proof types Page 7/9

²⁾ Does not apply to type HDS.

³⁾ The maximum speed for the respective type must be noted.
For additional information on the allowable shaft misalignment, please refer to the operating instructions.

TYPE ADS

for easy elastomer flexible replacement

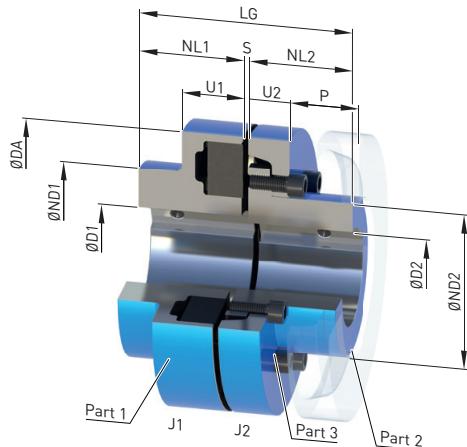

7

Size	Rated torque T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm										Mass moment of inertia J_1/J_2 kgm ²	↗ Article no. ¹⁾	Weight m kg			
			Bore with keyway to DIN 6885-1		D1		D2		DA	ND1	ND2	NL1/ NL2	S	U1	U2	P	LG	
			min.	max.	min.	max.												
118	160	5300	-	48	-	38	118	86	62	40	3	34	20	33	83	0.003	2LC0110-4AB	3.5
135	240	5100	-	55	-	45	135	100	75	50	3	36	23	38	103	0.006	2LC0110-5AB	5.5
152	360	4900	-	60	-	50	152	108	82	55	3	36	28	43	113	0.011	2LC0110-6AB	7.7
172	560	4250	-	65	-	58	172	118	95	60	4	41	28	47	124	0.019	2LC0110-7AB	10.5
194	880	3800	-	75	-	65	194	135	108	70	4	44	30	50	144	0.036	2LC0110-8AB	15
218	1340	3400	-	85	-	75	218	150	122	80	4	47	32	53	164	0.062	2LC0111-0AB	21
245	2000	3000	-	90	-	85	245	150	138	90	4	52	38	61	184	0.10	2LC0111-1AB	28
272	2800	2750	46	100	-	95	272	165	155	100	5.5	60	42	69	205.5	0.18	2LC0111-2AB	40
305	3900	2450	49	110	54	105	305	180	172	110	5.5	65	42	73	225.5	0.28	2LC0111-3AB	50
340	5500	2150	49	120	90	120	340	200	200	125	5.5	70	47	78	255.5	0.50	2LC0111-4AB	73
380	7700	2000	61	140	90	140	380	230	230	140	5.5	74	51	83	285.5	0.80	2LC0111-5AB	104
430	10300	1700	66	150	100	150	430	250	250	160	5.5	78	56	88	325.5	1.4	2LC0111-6AB	140
472	13500	1550	80	160	120	160	472	265	265	180	7.5	86	64	99	367.5	2.1	2LC0111-7AB	180
514	16600	1400	90	180	136	180	514	300	300	190	7.5	90	65	104	387.5	3.2	2LC0111-8AB	237
556	21200	1300	100	190	140	190	556	315	315	210	7.5	102	68	115	427.5	4.7	2LC0112-0AB	290

Configurable variants¹⁾

- $\emptyset D1$ Without finished bore
With finished bore
- $\emptyset D2$ Without finished bore
With finished bore

Notes

- The hub diameter of the component part is assigned according to the diameter of the finished bore. Where bore diameters overlap, the component with the smaller hub diameter is always selected.
- Weights and mass moments of inertia apply to maximum bores.

Ordering example


- N-EUPEX ADS coupling, size 135
- Part 1: Bore D1 42H7 mm, keyway to DIN 6885-1 and set screw
- Part 2: Bore D2 32H7 mm, keyway to DIN 6885-1 and set screw

Article no.: 2LC0110-5AB99-0AA0 L0X+M0T

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

TYPE BDS

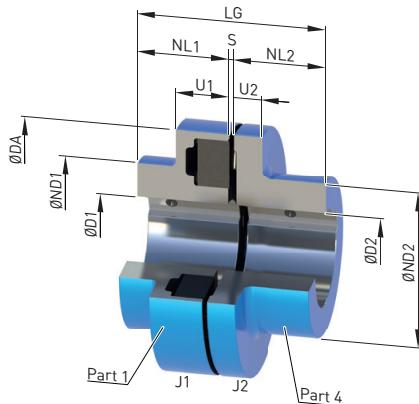

Size	Rated torque T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm										Mass moment of inertia J_1/J_2 kgm ²	↗ Article no. ¹⁾	Weight m kg		
			Bore with keyway to DIN 6885-1		D1 min.	D1 max.	D2 min.	D2 max.	DA	ND1	ND2	NL1/ NL2	S	U1	U2	LG	
66	19	7500	-	19	-	24	66	66	40	20	3	20	8	43	0.0001	2LC0110-0AA	0.50
76	34	7000	-	24	-	28	76	76	50	20	3	20	8	43	0.0002	2LC0110-1AA	0.65
88	60	6000	-	30	-	38	88	88	68	30	3	30	10	63	0.0006	2LC0110-2AA	1.8
103	100	5500	-	42	-	42	103	76	76	35	3	30	12	73	0.0015	2LC0110-3AA	3
118	160	5300	-	48	-	48	118	86	86	40	3	34	14	83	0.003	2LC0110-4AA	3.7
135	240	5100	-	55	-	55	135	100	100	50	3	36	18	103	0.007	2LC0110-5AA	6.1
152	360	4900	-	60	-	60	152	108	100	55	3	36	20	113	0.011	2LC0110-6AA	7.0
172	560	4250	-	65	-	65	172	118	108	60	4	41	20	124	0.019	2LC0110-7AA	11
194	880	3800	-	75	-	75	194	135	125	70	4	44	20	144	0.035	2LC0110-8AA	17
218	1340	3400	-	85	-	85	218	150	140	80	4	47	24	164	0.06	2LC0111-0AA	23
245	2000	3000	-	90	-	90	245	150	150	90	4	52	18	184	0.085	2LC0111-1AA	27
272	2800	2750	46	100	46	100	272	165	165	100	5.5	60	18	205.5	0.15	2LC0111-2AA	36
305	3900	2450	49	110	54	110	305	180	180	110	5.5	65	20	225.5	0.25	2LC0111-3AA	47

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- Weights and mass moments of inertia apply to maximum bores.

Ordering example


- N-EUPEX BDS coupling, size 103
- Part 1: Bore D1 42H7 mm, keyway to DIN 6885-1 and set screw
- Part 4: Bore D2 32H7 mm, keyway to DIN 6885-1 and set screw

Article no.: 2LC0110-3AA99-0AA0 LOX+MOT

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

TYPE HDS

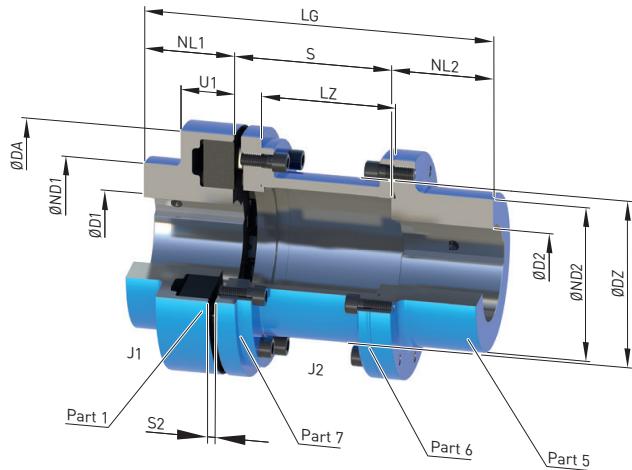

7

Size	Rated torque T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm												Mass moment of inertia		Article no. ¹⁾	Weight m kg		
			Bore with keyway to DIN 6885-1				DA	ND1	ND2	NL1	NL2	S	S2	LZ	DZ	LG	J_1 kgm ²	J_2 kgm ²		
88	60	6000	-	30	-	32	88	88	55	30	45	100 140	5	87 127	51	175 215	0.0007	0.0014 0.0015	2LC0110-2AC 2LC0110-2AC	2.8 2.9
103	100	5500	-	42	-	42	103	76	70	35	45	100 140	5	87 127	63	180 220	0.001	0.003 0.0033	2LC0110-3AC 2LC0110-3AC	4.0 4.3
118	160	5300	-	48	-	48	118	86	80	40	50	100 140	5	85 125	73	190 230	0.003	0.006 0.0064	2LC0110-4AC 2LC0110-4AC	5.3 5.7
												60 50	180 100	165 85	280 200			0.0068	2LC0110-4AC	6.1
135	240	5100	-	55	-	55	135	100	90	50	60	180 140	5	165 125	85	290 240	0.006	0.012 0.01	2LC0110-5AC 2LC0110-5AC	8.6 8.1
												70 80	200 250	185 235	320 380			0.012 0.013	2LC0110-5AC 2LC0110-5AC	8.9 9.4
152	360	4900	-	60	-	60	152	108	100	55	65	100 140	5	82 122	91	220 260	0.011	0.022 0.02	2LC0110-6AC 2LC0110-6AC	11.2 11.7
												65 65	180 200	162 182	300 320			0.023 0.024	2LC0110-6AC 2LC0110-6AC	12.2 12.5
												80 80	250 250	232 232	385 385					13.1

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

Size	Rated torque T_{KN} Nm	Speed n_{Kmax} rpm	Dimensions in mm										Mass moment of inertia		↗ Article no. ¹⁾	Weight m kg				
			Bore with keyway to DIN 6885-1				DA	ND1	ND2	NL1	NL2	S	S2	LZ	DZ	LG	J_1 kgm ²	J_2 kgm ²		
172	560	4250	-	65	-	65	172	118	108	60	70	100	81.5	230	0.019	0.03	2LC0110-7AC	14.3		
								70	140	121.5	270	6	161.5	111	310	0.034	2LC0110-7AC	15.0		
								70	180	161.5	310		181.5	200	330	0.036	2LC0110-7AC	15.9		
								70	200	181.5	330		231.5	250	390	0.037	2LC0110-7AC	16.2		
194	880	3800	-	75	-	75	194	135	125	70	80	140	121.5	290	0.037	0.058	2LC0110-8AC	21		
								180	6	161.5	330	181.5	200	350	0.062	2LC0110-8AC	22			
								200	250	231.5	400	231.5	250	400	0.064	2LC0110-8AC	23			
								140	180	118.5	310	178.5	200	350	0.069	2LC0110-8AC	24			
218	1340	3400	-	85	-	85	218	150	140	80	90	140	118.5	310	0.062	0.10	2LC0111-0AC	30		
								180	6	158.5	350	178.5	200	370	0.11	2LC0111-0AC	31			
								200	250	228.5	420	228.5	250	420	0.11	2LC0111-0AC	32			
								140	180	118.5	330	178.5	200	370	0.12	2LC0111-0AC	33			
245	2000	3000	-	90	-	90	245	150	150	90	100	140	118.5	330	0.09	0.16	2LC0111-1AC	35		
								180	6	158.5	370	178.5	200	390	0.17	2LC0111-1AC	36			
								200	250	228.5	430	228.5	250	430	0.18	2LC0111-1AC	37			
								180	200	152.5	390	172.5	185	410	0.19	2LC0111-1AC	39			
272	2800	2750	46	100	46	100	272	165	165	100	110	180	152.5	390	0.16	0.3	2LC0111-2AC	51		
								200	8	172.5	410	185.5	200	460	0.31	2LC0111-2AC	52			
								250	250	222.5	460	222.5	250	460	0.33	2LC0111-2AC	55			
								305	110	305	480	305	180	222.5	0.52	2LC0111-3AC	74			
340	5500	2150	49	120	51	120	340	200	200	125	140	250	8	222.5	250	515	0.50	0.87	2LC0111-4AC	105
380	7700	2000	61	140	51	140	380	230	230	140	150	250	8	220.5	272	540	0.80	1.4	2LC0111-5AC	130
430	10300	1700	66	150	51	150	430	250	250	160	180	250	8	185.5	310	590	1.4	2.5	2LC0111-6AC	205
472	13500	1550	80	160	51	160	472	265	265	180	180	250	10	182	354	610	2.1	4.1	2LC0111-7AC	235

Configurable variants¹⁾

- ØD1 Without finished bore
With finished bore
- ØD2 Without finished bore
With finished bore

Notes

- For dimension U1, see type ADS on page **Page 7/28** and type BDS on page **Page 7/29**
- During assembly, the gap dimension S2 must not exceed the permissible tolerance of +1 mm.
- For sizes 305 to 472 the outer diameter of part 5 and part 7 is smaller than ØDA.
- Weights and mass moments of inertia apply to maximum bores.

Ordering example

- N-EUPEX HDS coupling, size 103, S3 = 100 mm
- Part 1: Bore D1 42H7 mm, keyway to DIN 6885-1 and set screw
- Part 5: Bore D2 32H7 mm, keyway to DIN 6885-1 and set screw
- Coupling micro-balanced G6.3 at 1500 rpm in accordance with half parallel key standard

Article no.: 2LC0110-3AC99-0AA0-Z LOX+MOT+W02+Y95
 Plain text to Y95: G 6.3 N. n = 1500 rpm

¹⁾ To identify complete item numbers specifying the available finish boring options and – if necessary – further order options, please use our configurators on [flender.com](#).

↗ For online configuration on [flender.com](#), click on the item no.

SPARE AND WEAR PARTS

Elastomer flexibles of the N-EUPEX series

NBR elastomer flexibles 80 ShoreA standard type			
Size	Article No. (flexible set for one coupling)	Number of flexibles per set	Weight per set kg
58	2LC0170-0WA00-0AA0	4	0.012
68	2LC0170-1WA00-0AA0	5	0.015
80	2LC0170-2WA00-0AA0	6	0.02
95	2LC0170-3WA00-0AA0	6	0.03
110	2LC0170-4WA00-0AA0	6	0.045
125	2LC0170-5WA00-0AA0	6	0.06
140	2LC0170-6WA00-0AA0	6	0.09
160	2LC0170-7WA00-0AA0	7	0.12
180	2LC0170-8WA00-0AA0	8	0.17
200	2LC0171-0WA00-0AA0	8	0.23
225	2LC0171-1WA00-0AA0	8	0.3
250	2LC0171-2WA00-0AA0	8	0.38
280	2LC0171-3WA00-0AA0	8	0.55
315	2LC0171-4WA00-0AA0	9	0.7
350	2LC0171-5WA00-0AA0	9	0.85
400	2LC0171-6WA00-0AA0	10	1.2
440	2LC0171-7WA00-0AA0	10	1.5
480	2LC0171-8WA00-0AA0	10	2.1
520	2LC0172-0WA00-0AA0	10	2.6
560	2LC0172-1WA00-0AA0	10	3.6
610	2LC0172-2WA00-0AA0	10	4.9
660	2LC0172-3WA00-0AA0	10	6.3
710	2LC0172-4WA00-0AA0	10	7.6

NBR elastomer flexibles 90 Shore A for type DK (two-joint)			
Size	Article No. (flexible set for one coupling joint)	Number of flexibles per set	Weights per set kg
68	2LC0170-1VD00-0AA0	10	0.03
80	2LC0170-2VD00-0AA0	12	0.04
95	2LC0170-3VD00-0AA0	12	0.06
110	2LC0170-4VD00-0AA0	12	0.09
125	2LC0170-5VD00-0AA0	12	0.12
140	2LC0170-6VD00-0AA0	12	0.18
160	2LC0170-7VD00-0AA0	14	0.24
180	2LC0170-8VD00-0AA0	16	0.34
200	2LC0171-0VD00-0AA0	16	0.46
225	2LC0171-1VD00-0AA0	16	0.6

Notes

- The elastomer flexibles are wear parts. The service life depends on the operating conditions.

Elastomer flexibles of the N-EUPEX DS series

NBR elastomer flexibles standard type			
Size	Article No. (flexible set for one coupling)	Number of flexibles per set	Weight per set kg
66	2LC0110-0WA00-0AA0	4	0.012
76	2LC0110-1WA00-0AA0	5	0.015
88	2LC0110-2WA00-0AA0	6	0.021
103	2LC0110-3WA00-0AA0	6	0.033
118	2LC0110-4WA00-0AA0	6	0.048
135	2LC0110-5WA00-0AA0	6	0.072
152	2LC0110-6WA00-0AA0	6	0.1
172	2LC0110-7WA00-0AA0	7	0.16
194	2LC0110-8WA00-0AA0	8	0.21
218	2LC0111-0WA00-0AA0	8	0.28
245	2LC0111-1WA00-0AA0	8	0.45
272	2LC0111-2WA00-0AA0	8	0.64
305	2LC0111-3WA00-0AA0	8	0.72
340	2LC0111-4WA00-0AA0	9	0.92
380	2LC0111-5WA00-0AA0	9	1.2
430	2LC0111-6WA00-0AA0	10	1.6
472	2LC0111-7WA00-0AA0	10	2.0
514	2LC0111-8WA00-0AA0	10	2.5
556	2LC0112-0WA00-0AA0	10	3.2

Notes

- The elastomer flexibles are wear parts. The service life depends on the operating conditions.

